



# Traction cable

## RADOX TENUIS-TW 600V MM S

### Product description:

**RADOX TENUIS-TW 600V MM S** multicore cables, screened (overall screen)  
 Nominal voltage: 600 / 1000 V AC  
 Hazard level: M (extra low temperature, extra oil and extra fuel resistant)

### General features:


Halogen free, electrom- beam cross- linked cables with improved behaviour in case of fire, easy to strip, soldering iron resistant and flexible.

### Application :

The cables are intended for permanent installation in rail vehicles or for applications in which a limited alternating bending stress occur during service.

Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

### General composition of cable:

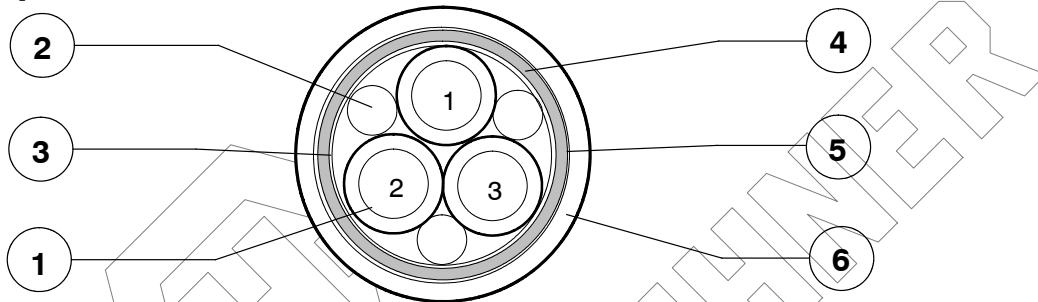

- |  |   |
|--|---|
| <ol style="list-style-type: none"> <li>1. RADOX TENUIS- TW 600V cores</li> <li>2. Filler (optional)</li> <li>3. Separator (optional)</li> <li>4. EMC- screen</li> <li>5. Separator</li> <li>6. Sheath</li> </ol> | <p>Conductor: stranded tin plated copper, acc. to EN 50306- 2<br/>         Insulation: RADOX EI 303<br/>         Colours: white, black numbered<br/>                   green- yellow (optional)</p> <p>RADOX 125 REC<br/>         Tape<br/>         Tin plated copper braid<br/>         Tape</p> <p>RADOX EM 104, acc. to EN 50264- 1<br/>         Colour : black, yellow marked</p> |
|--|---|

Marking: HUBER+SUHNER RADOX TENUIS- TW 600V nX[*cross section*] MM S [part. no. + batch. no.] [date of manufacture] [prod.- place]

### Technical data:

Voltage rating cond.- earth	U <sub>0</sub>	600	V AC
Voltage rating cond.- cond.	U	1000	V AC
maximum permissible Voltage rating AC cond.- earth		720	V AC
maximum permissible Voltage rating AC cond.- cond.	U <sub>m</sub>	1200	V AC
maximum permissible Voltage rating DC cond.- earth	V <sub>0</sub>	900	V DC
maximum permissible Voltage rating DC cond.- cond.		1500	V DC
Test voltage		3500	V AC
		8400	V DC
Temperature range		- 50 ... + 120	°C

### Min. bending radius

fixed installation	cable diameter ≤ 12mm	3 x D
	cable diameter > 12mm	4 x D
sporadic movement	cable diameter ≤ 12mm	4 x D
	cable diameter > 10 mm	5 x D

Copyright 2016 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

## HUBER+SUHNER AG

### Low Frequency Division

CH- 8330 Pfaffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com



# Traction cable

## RADOX TENUIS-TW 600V MM S

### NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours.

The lower temperature limit is determined by bending and elongation tests according to EN60811- 1- 4 Par. 8, respectively low temperature behaviour tests according to GOST 20.57.406- 81, method 204- 1 and GOST 17491- 80.

The specified bending radii require a careful and proper handling using proven fastening technologies.

### The cables are in conformity with:

<b>Fire protection on railway vehicles, category</b> .....	<b>Ia, Ib, II</b> .....	<b>BS 6853, GM/RT 2130</b>
Vertical flame spread .....	50 < L ≤ 540 mm .....	EN 60332- 1- 2
Vertical flame spread, bunched .....	L ≤ 2.5 m .....	EN 50266, BS 6853 An. D.8.7
Smoke density .....	A <sub>0</sub> ≤ BS 6853 .....	BS 6853 An. D.8.7
Toxicity .....	R ≤ 1.0 .....	BS 6853 An. B.1
<b>Fire protection on railway vehicles, hazard level</b> .....	<b>HL1 - HL3</b> .....	<b>EN 45545</b>
Vertical flame spread .....	50 < L ≤ 540 mm .....	EN 60332- 1- 2
Vertical flame spread, bunched, D ≤ 6 mm .....	L ≤ 1.5 m .....	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm .....	L ≤ 2.5 m .....	EN 50305, 9.1.1 (EN 60332- 3- 25)
Vertical flame spread, bunched, D ≥ 12 mm .....	L ≤ 2.5 m .....	EN 60332- 3- 24
Smoke density .....	T ≥ 70 % .....	EN 61034- 2
Toxicity .....	ITC ≤ 6 .....	EN 50305, 9.2
<b>Fire protection on railway vehicles, level of protection</b> .....	<b>1 - 4</b> .....	<b>DIN 5510</b>
Vertical flame spread .....	50 < L ≤ 540 mm .....	EN 60332- 1- 2
Vertical flame spread, bunched, D ≥ 6 mm .....	L ≤ 1.5 m .....	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm .....	L ≤ 2.5 m .....	EN 60332- 3- 25
Vertical flame spread, bunched, D ≥ 12 mm .....	L ≤ 2.5 m .....	EN 60332- 3- 24
Smoke density .....	T ≥ 60 % .....	EN 61034- 2
Corrosivity of combustion gases .....	pH ≥ 4.3, C ≤ 10 μS/mm .....	EN 50267- 2- 2
Amount of halogen acid gas .....	HCl + HBr ≤ 0.5 % .....	EN 50267- 2- 1
Content of fluorine .....	HF ≤ 0.1 % .....	EN 60684- 2, 45.2
Toxicity, insulation .....	ITC ≤ 6 .....	EN 50305, 9.2
Toxicity, filler and sheath .....	ITC ≤ 3 .....	EN 50305, 9.2
<b>Fire protection on railway vehicles, category</b> .....	<b>A1, A2, B</b> .....	<b>NF F16- 101</b>
Fire protection on railway vehicles, class .....	C / F0 .....	NF F16- 101
Vertical flame spread .....	50 < L ≤ 540 mm .....	NF C32- 070, 2.1
Vertical flame spread, bunched .....	L ≤ 300 mm .....	NF C32- 070, 2.2
Smoke index .....	I.F. ≤ 5 .....	X10- 702- 2, NF X70- 100- 1
<b>Fire protection on railway vehicles</b> .....	<b>Fulfilled</b> .....	<b>NFPA 130</b>
Vertical flame spread, bunched .....	L ≤ 1.5 m .....	UL 1685, 12 (FT4 exp.)
Smoke density .....	TSR ≤ 150 m <sup>2</sup> , PSRR ≤ 0.40 m <sup>2</sup> /s .....	UL 1685, 12 (FT4 exp.)
<b>Fire protection on railway vehicles, hazard level</b> .....	<b>LR1 - LR4</b> .....	<b>UNI CEI 11170</b>
Vertical flame spread .....	50 < L ≤ 540 mm .....	EN 60332- 1- 2
Vertical flame spread, bunched, D ≤ 6 mm .....	L ≤ 1.5 m .....	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm .....	L ≤ 2.5 m .....	EN 60332- 3- 25
Vertical flame spread, bunched, D ≥ 12 mm .....	L ≤ 2.5 m .....	EN 60332- 3- 24
Smoke density .....	T ≥ 70 % .....	EN 61034- 2
Corrosivity of combustion gases .....	pH ≥ 4.3, C ≤ 10 μS/mm .....	EN 50267- 2- 2
Amount of halogen acid gas .....	HCl + HBr ≤ 0.5 % .....	EN 50267- 2- 1
Toxicity, insulation .....	ITC ≤ 6 .....	EN 50305, 9.2
Toxicity, filler and sheath .....	ITC ≤ 3 .....	EN 50305, 9.2
<b>Requirement of hazard level Code M</b> .....	(according to EN 50264- 1 or EN 50306- 1)	
Extra low temperature .....	- 40°C	
Extra oil resistance .....	IRM 902, 72h, 100°C	
Extra fuel resistance .....	IRM 903, 168h, 70°C	

### Applicable Documents:

581998 current rating for multi core cables



# Traction cable

## RADOX TENUIS-TW 600V MM S

Construction n x mm <sup>2</sup>	Conductor Dia. <sub>nom.</sub> mm	Core Dia. <sub>nom.</sub> mm	Cable Dia. mm	R <sub>20</sub> max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H + S Part No.
2x0.25	0.61	1.17	4.45 ± 0.3	88.5	279	1.1	3.2	85 032 996
10x2x0.25	0.61	1.17	11.1 ± 0.4	88.5	1438	7.8	17.4	85 070 661
24x2x0.25	0.61	1.17	16.3 ± 0.5	88.5	3045	15.8	35.4	85 067 930

Construction n x mm <sup>2</sup>	Conductor Dia. <sub>nom.</sub> mm	Core Dia. <sub>nom.</sub> mm	Cable Dia. mm	R <sub>20</sub> max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H + S Part No.
2x0.34	0.76	1.3	4.7 ± 0.3	54.7	304	1.4	3.7	85 070 508
3x0.34	0.76	1.3	4.9 ± 0.3	54.7	325	1.8	4.2	85 024 293
4x0.34	0.76	1.3	5.25 ± 0.3	54.7	368	2.2	4.9	85 070 510
24x0.34	0.76	1.3	10.5 ± 0.4	54.7	1423	11.4	20.5	85 073 629

Construction n x mm <sup>2</sup>	Conductor Dia. <sub>nom.</sub> mm	Core Dia. <sub>nom.</sub> mm	Cable Dia. mm	R <sub>20</sub> max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H + S Part No.
2x0.5	0.88	1.42	4.8 ± 0.3	40.1	323	1.8	4.2	12 568 117
3x0.5	0.88	1.42	5.3 ± 0.3	40.1	395	2.3	5.1	12 568 118
4x0.5	0.88	1.42	5.4 ± 0.3	40.1	403	2.9	5.6	12 568 119
5x0.5	0.88	1.42	6.2 ± 0.3	40.1	527	3.7	7.2	12 581 351
6x0.5	0.88	1.42	6.5 ± 0.3	40.1	590	4.4	8.2	12 568 120
7x0.5	0.88	1.42	7.2 ± 0.3	40.1	751	5.0	9.7	12 583 138
8x0.5	0.88	1.42	7.5 ± 0.3	40.1	831	5.7	10.9	12 581 352
9x0.5	0.88	1.42	7.9 ± 0.3	40.1	813	6.2	11.4	12 581 450
10x0.5	0.88	1.42	7.9 ± 0.3	40.1	839	6.6	11.9	84 112 800
12x0.5	0.88	1.42	8.1 ± 0.3	40.1	882	7.6	13.0	12 581 353
15x0.5	0.88	1.42	9.0 ± 0.3	40.1	1114	9.3	16.0	12 582 036
16x0.5	0.88	1.42	9.1 ± 0.3	40.1	1123	9.8	16.4	12 583 727
20x0.5	0.88	1.42	10.6 ± 0.4	40.1	1544	12.9	22.2	84 123 311
22x0.5	0.88	1.42	10.9 ± 0.4	40.1	1670	13.9	23.7	85 003 491
24x0.5	0.88	1.42	11.3 ± 0.4	40.1	1686	14.8	24.9	84 141 106
25x0.5	0.88	1.42	11.3 ± 0.4	40.1	1708	15.3	25.4	12 582 037
30x0.5	0.88	1.42	12.3 ± 0.4	40.1	1992	19.3	31.0	12 582 909
36x0.5	0.88	1.42	13.3 ± 0.4	40.1	2365	23.0	36.7	12 582 038
42x0.5	0.88	1.42	14.7 ± 0.4	40.1	2821	26.6	43.0	12 582 039
2x2x0.5	0.88	1.42	7.2 ± 0.3	40.1	661	3.6	8.3	12 568 121



# Traction cable

## RADOX TENUIS-TW 600V MM S

3x2x0.5	0.88	1.42	8.1 ± 0.3	40.1	802	4.8	10.3	12 581 451	
4x2x0.5	0.88	1.42	9.3 ± 0.3	40.1	1076	6.1	13.6	12 568 122	
5x2x0.5	0.88	1.42	10.3 ± 0.4	40.1	1338	7.9	17.0	12 582 041	
6x2x0.5	0.88	1.42	11.1 ± 0.4	40.1	1592	9.3	19.8	12 582 042	
8x2x0.5	0.88	1.42	13.5 ± 0.4	40.1	2422	13.8	29.3	12 583 728	
10x2x0.5	0.88	1.42	13.7 ± 0.4	40.1	1996	15.7	29.0	84 104 571	
12x2x0.5	0.88	1.42	13.0 ± 0.3	40.1	1770	17.5	28.3	12 581 358	

Construction n x mm <sup>2</sup>	Conductor Dia.nom. mm	Core Dia. nom. mm	Cable Dia. mm	R <sub>20</sub> max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H + S Part No.	
2x(2x0.5)	0.88	1.42	11.8 ± 0.4	40.1	1887	8.8	22.5	12 582 040	
5x(3x0.5)	0.88	1.42	14.1 ± 0.4	40.1	2882	11.3	31.9	12 583 566	2)
6x(3x0.5)	0.88	1.42	14.6 ± 0.3	40.1	3134	13.6	35.0	12 584 344	1)
2x(6x0.5)	0.88	1.42	15.5 ± 0.5	40.1	3611	8.8	32.9	85 022 107	1)
2x0.5 + 3x0.75	0.88 1.09	1.42 1.62	7.7 ± 0.3	40.1 26.7	750	4.9	10.0	85 065 402	3)

1) without add. overall screen

2) without add. Overall screen, Trippelmarking 10,20,30,40,50

3) Colour of sheath: violet



# Traction cable

## RADOX TENUIS-TW 600V MM S

Construction n x mm <sup>2</sup>	Conductor Dia.nom. mm	Core Dia. nom. mm	Cable Dia. mm	R <sub>20</sub> max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H + S Part No.	
2x0.75	1.09	1.62	5.0 ± 0.3	26.7	343	2.3	4.8	12 568 514	
3x0.75	1.09	1.62	5.4 ± 0.3	26.7	397	3.1	5.8	12 568 515	
3G0.75	1.09	1.62	5.4 ± 0.3	26.7	397	3.1	5.8	12 583 993	
4x0.75	1.09	1.62	6.0 ± 0.3	26.7	474	4.2	7.4	12 568 516	
4G0.75	1.09	1.62	6.0 ± 0.3	26.7	474	4.2	7.4	12 583 994	
5x0.75	1.09	1.62	6.7 ± 0.3	26.7	611	5.2	9.2	85 063 744	
6x0.75	1.09	1.62	7.2 ± 0.3	26.7	721	6.0	10.6	12 568 517	
7x0.75	1.09	1.62	8.0 ± 0.3	26.7	909	7.0	12.7	12 581 578	
8x0.75	1.09	1.62	8.4 ± 0.3	26.7	1024	7.9	14.2	12 582 045	
10x0.75	1.09	1.62	8.7 ± 0.3	26.7	986	9.3	15.5	12 582 046	
12x0.75	1.09	1.62	9.0 ± 0.3	26.7	1053	10.8	17.2	12 581 354	
14x0.75	1.09	1.62	9.8 ± 0.3	26.7	1235	13.1	20.6	12 584 333	
16x0.75	1.09	1.62	10.5 ± 0.4	26.7	1426	15.0	23.6	12 582 047	
18G0.75	1.09	1.62	11.0 ± 0.4	26.7	1605	16.4	26.0	85 001 068	
24x0.75	1.09	1.62	12.8 ± 0.4	26.7	2034	23.3	35.5	12 582 049	
25x0.75	1.09	1.62	12.8 ± 0.4	26.7	2059	23.4	35.6	85 063 741	
27x0.75	1.09	1.62	13.2 ± 0.4	26.7	2198	25.4	38.4	84 114 908	
30x0.75	1.09	1.62	13.7 ± 0.4	26.7	2372	27.6	41.4	84 122 437	
37x0.75	1.09	1.62	15.7 ± 0.5	26.7	3130	33.3	51.7	84 122 439	
2x2x0.75	1.09	1.62	8.2 ± 0.3	26.7	859	4.9	10.7	12 582 050	
3x2x0.75	1.09	1.62	9.0 ± 0.3	26.7	952	6.6	13.0	12 581 579	
4x2x0.75	1.09	1.62	10.5 ± 0.4	26.7	1327	9.0	18.2	12 584 787	
4x3x0.75	1.09	1.62	11.3 ± 0.4	26.7	1570	11.9	22.0	84 147 685	
6x2x0.75	1.09	1.62	12.8 ± 0.4	26.7	1760	14.1	25.4	85 022 422	
8x2x0.75	1.09	1.62	15.2 ± 0.5	26.7	2980	16.4	36.1	12 585 078	
6x(2x0.75)	1.09	1.62	19.5 ± 0.5	26.7	5073	24.8	61.6	12 584 429	1)
5x(4x0.75)	1.09	1.62	18.3 ± 0.5	26.7	4700	20.6	53.8	12 583 090	2)

G = earth = green-yellow

1) with add. overall screen

2) Quat- core no.: 1,4,2,3/ 5,8,6,7/ 9,12,10,11/ 13,16,14,15/ 17,20,18,19

Issue  
08.02.2016 / 2315

Release  
2513

Supersedes Issue AJ  
22.12.2015

Technical Datasheet  
Page 5/8

**568 354 AK (e)**



# Traction cable

## RADOX TENUIS-TW 600V MM S

Construction n x mm <sup>2</sup>	Conductor Dia.nom. mm	Core Dia. nom. mm	Cable Dia. mm	R <sub>20</sub> max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H + S Part No.
2x1	1.23	1.77	5.6 ± 0.3	20.0	432	2.8	5.9	12 568 162
3x1	1.23	1.77	6.0 ± 0.3	20.0	478	4.1	7.4	12 568 163
4x1	1.23	1.77	6.5 ± 0.3	20.0	553	5.2	8.9	12 568 164
5x1	1.23	1.77	7.0 ± 0.3	20.0	656	6.3	10.5	12 583 729
6x1	1.23	1.77	7.8 ± 0.3	20.0	839	7.5	12.8	12 568 165
7x1	1.23	1.77	8.5 ± 0.3	20.0	1015	8.6	14.9	12 583 999
8x1	1.23	1.77	8.9 ± 0.3	20.0	1140	9.6	16.5	12 581 449
12x1	1.23	1.77	9.9 ± 0.3	20.0	1226	14.1	21.6	12 581 355
16x1	1.23	1.77	11.2 ± 0.4	20.0	1607	18.2	27.9	12 584 811
20x1	1.23	1.77	12.7 ± 0.4	20.0	2088	23.8	36.2	84 143 022
22x1	1.23	1.77	13.3 ± 0.3	20.0	2307	26.3	39.8	12 581 356
37x1	1.23	1.77	16.7 ± 0.5	20.0	3506	41.8	62.3	84 129 985
2x2x1	1.23	1.77	8.8 ± 0.3	20.0	957	5.9	12.6	12 581 357
5x2x1	1.23	1.77	12.7 ± 0.4	20.0	1949	14.6	7.8	12 584 697
6x2x1	1.23	1.77	14.0 ± 0.4	20.0	2424	17.2	33.4	12 584 412
8x2x1	1.23	1.77	16.7 ± 0.5	20.0	3668	22.9	46.7	12 585 378
3x4x1	1.23	1.77	12.4 ± 0.4	20.0	1885	16.6	28.7	12 583 002
4x4x1	1.23	1.77	14.2 ± 0.4	20.0	2362	21.1	36.2	12 584 118



# Traction cable

## RADOX TENUIS-TW 600V MM S

Construction n x mm <sup>2</sup>	Conductor Dia. <sub>nom.</sub> mm	Core Dia. nom. mm	Cable Dia. mm	R <sub>20</sub> max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H + S Part No.
2x1.5	1.49	2.17	6.5 ± 0.3	13.7	564	4.2	8.3	12 568 172
3x1.5	1.49	2.17	6.8 ± 0.3	13.7	599	5.6	9.6	12 568 173
3G1.5	1.49	2.17	6.8 ± 0.3	13.7	599	5.6	9.6	12 583 730
4x1.5	1.49	2.17	7.4 ± 0.3	13.7	696	7.1	11.6	12 568 174
4G1.5	1.49	2.17	7.4 ± 0.3	13.7	696	7.0	11.6	12 583 731
5x1.5	1.49	2.17	8.3 ± 0.3	13.7	911	8.7	14.5	12 582 053
6x1.5	1.49	2.17	9.0 ± 0.3	13.7	1094	10.3	17.1	12 581 465
7x1.5	1.49	2.17	10.0 ± 0.3	13.7	1360	12.5	20.9	85 031 963
7G1.5	1.49	2.17	10.0 ± 0.3	13.7	1360	12.5	20.9	85 021 166
8x1.5	1.49	2.17	11.0 ± 0.4	13.7	1694	14.3	24.7	12 586 408
9G1.5	1.49	2.17	11.6 ± 0.4	13.7	1922	15.7	27.4	85 024 345
10x1.5	1.49	2.17	11.4 ± 0.4	13.7	1610	17.0	27.1	12 583 544
12x1.5	1.49	2.17	12.1 ± 0.4	13.7	1749	21.3	32.2	12 582 054
16x1.5	1.49	2.17	13.6 ± 0.4	13.7	2245	27.5	41.1	12 582 055
18x1.5	1.49	2.17	14.4 ± 0.4	13.7	2559	31.1	46.5	12 582 056
42x1.5	1.49	2.17	21.2 ± 0.5	13.7	5494	68.2	100	85 020 521
48x1.5	1.49	2.17	21.9 ± 0.5	13.7	5224	76.3	120	85 022 986
64x1.5	1.49	2.17	25.5 ± 0.6	13.7	7713	102	146	85 020 967
2x2x1.5	1.49	2.17	10.6 ± 0.4	13.7	1400	9.0	18.5	84 105 087
4x2x1.5	1.49	2.17	13.5 ± 0.4	13.7	1846	17.0	29.6	12 585 486
6x2x1.5 *)	1.49	2.17	16.3 ± 0.5	13.7	3226	23.2	44.7	12 585 487
12x2x1.5	1.49	2.17	20.6 ± 0.5	13.7	4094	43.6	70.2	85 004 430
3x4x1.5	1.49	2.17	14.8 ± 0.4	13.7	2612	23.1	39.7	12 584 953

\*) higher sheath thickness

Construction n x mm <sup>2</sup>	Con-ductor Dia. <sub>nom.</sub> mm	Core Dia. nom. mm	Cable Dia. mm	R <sub>20</sub> max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H + S Part No.
2x2.5	1.96	2.75	7.8 ± 0.3	8.21	807	6.3	12.0	12 568 175
3x2.5	1.96	2.75	8.2 ± 0.3	8.21	861	8.5	14.2	12 582 658
3G2.5	1.96	2.75	8.2 ± 0.3	8.21	861	8.6	14.4	12 583 736
4x2.5	1.96	2.75	9.1 ± 0.3	8.21	1054	11.1	17.9	12 582 058
5x2.5	1.96	2.75	10.3 ± 0.4	8.21	1365	14.3	23.0	12 584 926



# Traction cable

## RADOX TENUIS-TW 600V MM S

Construction n x mm <sup>2</sup>	Conductor Dia.nom. mm	Core Dia. nom. mm	Cable Dia. mm	R <sub>20</sub> max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H + S Part No.
6x2.5	1.96	2.75	11.4 ± 0.4	8.21	1723	17.0	27.7	12 582 059
7x2.5	1.96	2.75	12.5 ± 0.4	8.21	2072	21.0	33.7	12 584 927
10x2.5	1.96	2.75	14.2 ± 0.4	8.21	2384	28.4	43.4	84 091 733
2x2x2.5	1.96	2.75	13.2 ± 0.4	8.21	2167	15.1	29.7	12 583 449
2x4	2.46	3.35	8.9 ± 0.3	5.09	1077	9.3	16.3	12 583 873
3x4	2.46	3.35	9.7 ± 0.3	5.09	1216	12.9	20.9	85 003 133
4x4	2.46	3.35	11.0 ± 0.4	5.09	1526	17.7	27.4	85 003 135

### Cables with colored cores:

Construction n x mm <sup>2</sup>	Con- ductor Dia.nom mm	Core colors	Core Dia. nom mm	Cable Dia. mm	R <sub>20</sub> max Ω/km	Fireload nom. kJ/m	Weight Copper Cable kg/100m		H + S Part No.
3V0.5	0.88	BN-BK-BU	1.42	5.2 ± 0.3	40.1	379	2.3	4.9	12 584 130
4V0.5	0.88	BU-WH- BN-BK	1.42	5.4 ± 0.3	40.1	400	2.9	5.6	12 584 097
4V0.5	0.88	BU-BK-BN- GNYE	1.42	5.4 ± 0.3	40.1	400	2.8	5.4	85 027 557
5V0.5	0.88	BN-BK-BU- WH-GY	1.42	6.3 ± 0.3	40.1	546	3.7	7.4	84 092 080
2V0.75	1.09	BK-BU	1.62	5.3 ± 0.3	26.7	390	2.3	5.1	12 584 133

Cores: Core details according to H+S Datasheet 564 264

R<sub>20</sub>: Conductor resistance according to EN 50306- 2

C': Capacity per unit length, core/core

V: Colored cores

G: earth = green-yellow

### Colour Legend:

BK: black

BN: brown

RD: red

OG: orange

YE: yellow

GN: green

BU: blue

VT: violet

GNYE: green-yellow

GY: grey

WH: white

PK: pink

TQ: turquoise